EVOLUTION IN HIGH SPEED COOKING

HIGH SPEED COMMERCIAL COMBINATION OVEN

The Amana[®] AXP20

The new AXP20 utilizes an innovative combination of convection, radiant and microwave technology to cook foods up to 15 times faster than traditional cooking methods.

Key Features

- Combination of radiant, convection and microwave to quickly toast and heat a variety of products.
- Up to 360 programmable menu items simplifies cooking and ensures consistent results.
- Automatic voltage sensor automatically adjusts for 208 or 230 V installation.
- Catalytic convertor filters grease and odors from air.
- EZCard Menu Management System simplifies menu programming updates.
- User-friendly controls are easy to use and require minimal user training.
- Durable stainless steel exterior and interior for years of commercial foodservice use.
- Global service network provides on-going product support.
- UL-KNLZ certified for ventless installation
- Limited 3-year warranty.





AXP20

A Powerful & Cost-Effective Way to ...

- Serve quality food, quickly
- Increase food sales and profits
- Cook fresher, hotter foods on demand

Maximize Your Profits

The powerful Amana AXP20 is built to handle the fast pace and grueling demands of the busiest kitchens. It's a highperforming, heavy-duty unit that's ideal for a broad array of foodservice applications.

For more information about any of our fine commercial microwave ovens, contact your Amana distributor, call us direct at 800.233.2366 or visit our web site: PART OF AGA FOODSERVICE GROUP






IGH PERFORMANCE HAS A NAME™ www.amanacommercial.com



HIGH SPEED COMMERCIAL COMBINATION OVEN

Configuration	Countertop	Cabinet	Exterior Dimensions	Interior Dimensions
Control System	Touch and dial	Height	20-1/4"	10" (7-3/4" from rack)
Programmable Control Pads	10	Width	25"	16"
Total Programmable Settings	360	Depth (overall without handle)	25-5/8"	15"
Power Levels	11	Depth (door open 90°)	37-5/8"	
Maximum Cooking Time	60 minutes	Usable Cavity Space	1.07 cubic ft.	
<u> </u>	Multi-level menu capability	Outercase Material	Stainless Steel	
Defrost	Yes, 20% Power	Cavity Interior Finish	Stainless Steel	
Time Entry Option	Yes	Electrical Characteristics		
Microwave Distribution System	Rotating Antenna	Power Consumption	5700 W	
Magnetron(s)	2	Power Output (Microwave)	2200 W*	
Display	LCD, Touch Screen, Backlit	Power Source	208 V - 240 V, 60 Hz, 30 A single phase	
Stage Cooking	4 stages			
Interior Light	No	Plug Configuration	Ν	VEMA 6-30
1 57	own, Ergonomic Designed Handle		-	2450 MHz
Automatic Voltage Sensor	Yes	— Power Cord Length	5' (1.5 m)	
EZCard Menu Management Yes				5 (1.5 11)
Temperature Range	200 - 520° F		150 lbs. (52 kg)	
Temperature Increments	5° F			
Air Filter	Yes, Removable	Approximate Shipping	175 lbs. (56 kg)	
Fan Speed	0-100%	Shipping Box Size	34./5″W x	x 28.25" H x 32.5" D
Fan Speed Increments	10%			
Microwave Power	0-100%			
Microwave Power Increments	10%			
Radiant Level	0-100%			
Radiant Level Increments	10%			
Rack F	Removable, one rack position			
Warranty Includes	Limited 3-Year - 1 Year Full Parts, Labor, and Travel			

Amana's continuing commitment to quality products may mean a change in specification without notice. *Microwave output ratings based on IEC 705 test.

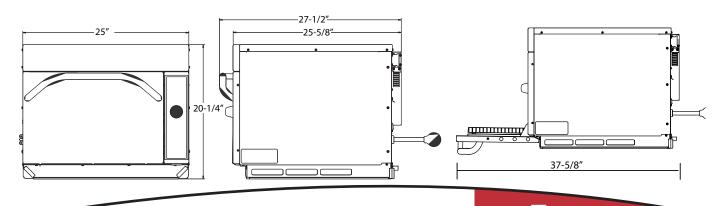

For more information about any of our fine commercial microwave ovens, contact your Amana distributor, call us direct at 800.233.2366 or visit our web site:

PART OF AGA FOODSERVICE GROUP www.amanacommercial.com. Form # ACRR0720 rev 10/07 ©2007 AGA Commercial Products, Inc. Printed in the USA.



HIGH PERFORMANCE HAS A NAME www.amanacommercial.com